Jet





Automation for swing gates

DESIGN AND TECHNOLOGY



Alluminium frame



Mechanical limit switch




Bronze gear



Easy and quick cable connector



Two color option, gray or black

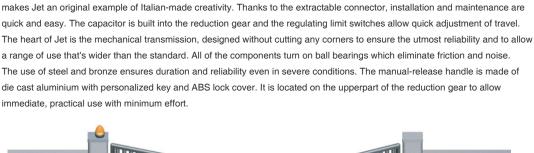

Designed to enhance any sort of gate, it fits into any setting. The elegant, wrap-around line of the two die cast aluminium shells





TECHNICAL DATA		JET 230 F	JET 230 S	JET 24
Power supply	(Vac 50Hz)	230	230	230
Motor power supply	(Vac/Vdc)	230	230	24
Motor power	(W)	200	170	50
Operating temperature	(°C)	-20 ÷ +55	-20 ÷ +55	-20 ÷ +55
Run	(mm)	360	360	360
Speed	(m/min)	0,016	0,01	0,013 ÷ 0,016
Cycle of work	(%)	30	30	90
Dimensions	(mm)	100x820x110	100x820x110	100x820x110
Automation weight	(Kg)	8	8	7
Gate max weight	(m/Kg)	3m / 600Kg	3m / 600Kg	3m / 600Kg



- * Quality Italian Product
- * Easy installtion
- * Fast, simple setup

Installer Details



Jet/ Couper



Swing gate motor accessories

